


# U-Link

H.265 16CH 4K/8MP Non-POE NVR  
with 2SATA

UL-16NVR4K28-IP

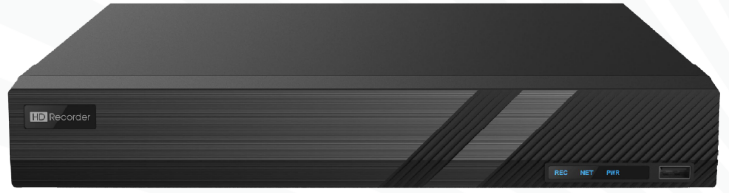

## FEATURES

Support Ultra265/H.265/H.264 video formats.

16-channel input.

Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T.


HDMI and VGA simultaneous output.

Up to 8 Megapixels resolution recording.

# U-Link

H.265 16CH 4K/8MP Non-POE NVR  
with 2SATA

UL-16NVR4K28-IP

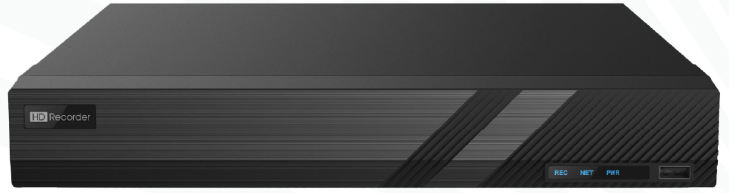

## FEATURES

2 SATA HDDs, up to 10TB for each HDD.

ANR technology to enhance the storage reliability when the network is disconnected.

Support cloud upgrade.

# U-Link

H.265 16CH 4K/8MP Non-POE NVR

with 2SATA

UL-16NVR4K28-IP



## SPECIFICATION

<b>Model</b>	UL-16NVR4K28-IP
<b>Video/Audio Input</b>	
IP Video Input	16-ch
Two-way Audio Input	1-ch, RCA
<b>Network</b>	
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
<b>Video/Audio Output</b>	
HDMI/VGA Output	HDMI: 4K (3840x2160)@30, 1920x1080p@60, 1920x1080p@50, 1600x1200@60, 1280x1024@60, 1280x720@60, 1024x768@60 VGA: 1920x1080p@60, 1920x1080p@50, 1280x1024@60, 1280x720@60, 1024x768@60
Audio Output	1-ch, RCA
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16
<b>Decoding</b>	
Decoding format	Ultra265/H.265/H.264
Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30
<b>Hard Disk</b>	
SATA	2 SATA interface
Capacity	up to 10TB for each disk
<b>External Interface</b>	
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0 Front panel: 1 x USB2.0
<b>General</b>	
Power Supply	12V DC Power Consumption: ≤ 15 W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions (WxDxH)	380mm X 315mm X53mm (15.0" X 12.4" X2.1")
Weight (without HDD)	≤ 0.98Kg (2.16lb)