## **U**SLink

UL-32NVR4K28-IP








UL-32NVR4K28-IP



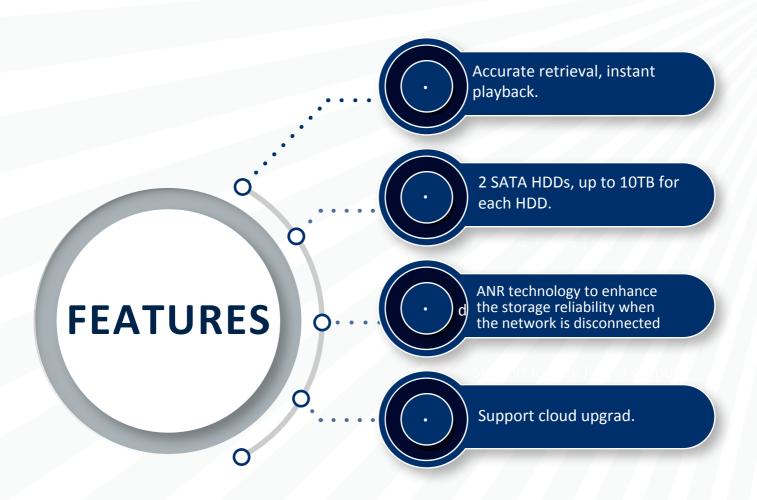



## UL-32NVR4K28-IP



SPECIFICATION	
Model	UL-32NVR4K28-IP
Video/Audio Input	
IP Video Input	32-ch
Two-way Audio Input	1-ch, RCA
Network	
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA Output	HDMI: 4K (3840x2160)@30, 1920x1080p@60,1920x1080p@50, 1600x1200@60,1280x1024@60, 1280x720@60 1024x768@60 VGA: 1920x1080p@60,1920x1080p@50,1280x1024@60,1280x720@60,1024x768@60
Audio Output	1-ch, RCA
Recording Resolution	8MP/5MP/4MP/3MP/1080p/960p/720p/960H/D1/2CIF/CIF
Synchronous Playback	32-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Decoding	
Decoding format	Ultra265/H.265/H.264
Live view/Playback	8MP/5MP/4MP/3MP/1080p/960p/960H/720p//D1/2CIF/CIF
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30,32 x D1
Hard Disk	
SATA	2 SATA interface
Capacity	up to 10TB for each disk
Smart	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search. Behavior search
Statistical Analysis	People counting
External Interface	
Network Interface	2 RJ-45 10M/100M/1000M self-adaptitive Ethernet Interfaces
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0 Front panel: 1 x USB2.0
General	
Power Supply	12V DC Power Consumptition: ≤ 15 W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH(non-condensing)
Working Environment  Dimensions (W×D×H)	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH(non-condensing)  380mm × 315mm ×49mm (15.0" × 12.4" ×1.9" )





